



INNERDUCT PULLING PRODUCTS




Swivel Head Innerduct Pulling Eye

The Innerduct Pulling Eye is a hybrid tool that combines features from standard innerduct pulling eyes and Condux swivels. A swivel head prevents twisting and binding of the innerduct as it is installed. It eliminates the need for a separate swivel on each pulling eye when installing single innerducts into individual conduits or multiple innerducts into a single conduit. Its short length is an advantage on tight bends compared to using a separate swivel and pulling eye. Easily installed using a 1³/₈" deep socket or adjustable wrench.

NOTE: To determine correct pulling eye size, obtain the actual innerduct inside diameter (I.D.). The I.D. measurement must be greater than dimension A and smaller than dimension B.

Replacement Clevis Pins for Swivel Head Innerduct Pulling Eyes

Part Number	Replacement Part Number
08960712	08081036
08960715	08081036
08960720	08081036

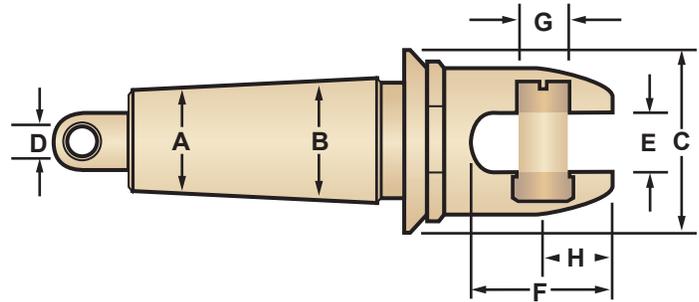

! See compatibility chart on page 61 to determine what Innerduct Pulling Eyes work with various standard innerduct sizes.

Part Number	Nominal Size	Innerduct ID Range		Max OD C		Hole Diameter D		Slot Width E		Slot Depth F		Pin Diameter G		Pin Center H	
	(IN.)	A - B (IN.)	A - B (MM)	(IN.)	MM	(IN.)	MM	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)
08960712	1 - 1.25	1.06 - 1.43	27 - 37	1.75	44	.44	11	.56	14	1.31	33	.43	11	.56	14
08960715	1.50	1.37 - 1.68	35 - 43	2.00	51	.44	11	.56	14	1.31	33	.43	11	.56	14
08960720	2.00	1.93 - 2.12	49 - 54	2.44	62	.44	11	.56	14	1.31	33	.43	11	.56	14

All Swivel Head Innerduct Pulling Eyes are compatible with all Condux pulling harness legs.



CONDUX

INNERDUCT PULLING PRODUCTS



Clevis Head Innerduct Pulling Eye

With the same tapered threads as the fixed head innerduct pulling eyes, these pulling eyes feature a slotted head with clevis pin to permit direct attachment to any Condux multiple pulling harness leg ends. When properly sized and installed, these eyes will not pull out of the innerduct until the pulling tensions have greatly exceeded the maximum pulling tensions recommended by the innerduct manufacturers.

NOTE: To determine correct pulling eye size, obtain the actual innerduct inside diameter (I.D.). The I.D. measurement must be greater than dimension A and smaller than dimension B.

Replacement Clevis Pins for Clevis Head Innerduct Pulling Eyes

Part Number	Replacement Part Number
08914310	08081046
08914320	08081036
08914330	08210135
08914340	08081016
08914350	08081016
08914360	08081006




See compatibility chart on page 61 to determine what Innerduct Pulling Eyes work with various standard innerduct sizes.



PULLING EYES & ACCESSORIES

Part Number	Nominal Size	Innerduct ID Range		Max OD C		Hole Diameter D		Slot Width E		Slot Depth F		Pin Diameter G		Pin Center H	
	(IN.)	A - B (IN.)	A - B (MM)	(IN.)	MM	(IN.)	MM	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)
08914310	0.75	.73 - .94	19 - 24	1.25	32	.25	6	.56	14	1.34	34	.37	9	.59	15
08914320	1.00	.93 - 1.06	24 - 27	1.38	35	.25	6	.56	14	1.34	34	.43	11	.56	14
08914330	1.25	1.16 - 1.43	29 - 36	1.75	44	.38	10	.75	19	1.78	45	.62	16	.81	21
08914340	1.50	1.58 - 1.75	40 - 44	2.00	51	.38	10	.75	19	1.78	45	.62	16	.72	18
08914350	1.75	1.72 - 1.85	44 - 47	2.25	57	.38	10	.75	19	1.78	45	.62	16	.72	18
08914360	2.00	1.97 - 2.12	50 - 54	2.50	64	.38	10	.75	19	2.50	64	.87	22	1.23	31

All Clevis Head Innerduct Pulling Eyes are compatible with all Condux pulling harness legs.

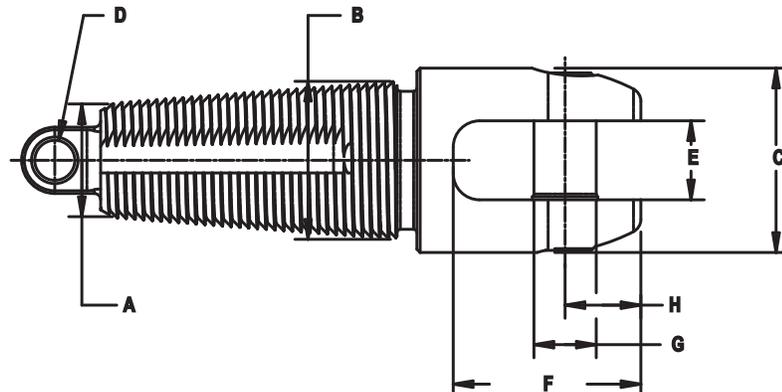



INNERDUCT PULLING PRODUCTS




! See compatibility chart on page 61 to determine what Innerduct Pulling Eyes work with various standard innerduct sizes.

Fixed Head Innerduct Pulling Eye

Tapered buttress threads thread into the innerduct for maximum pulling strength. These eyes connect directly to a Condux swivel (see page 34). When properly sized and installed, these eyes will not pull out of the innerduct until the pulling tensions have greatly exceeded the maximum pulling tensions recommended by the innerduct manufacturers.

NOTE: To determine correct pulling eye size, obtain the actual innerduct inside diameter (I.D.). The I.D. measurement must be greater than dimension A and smaller than dimension B.

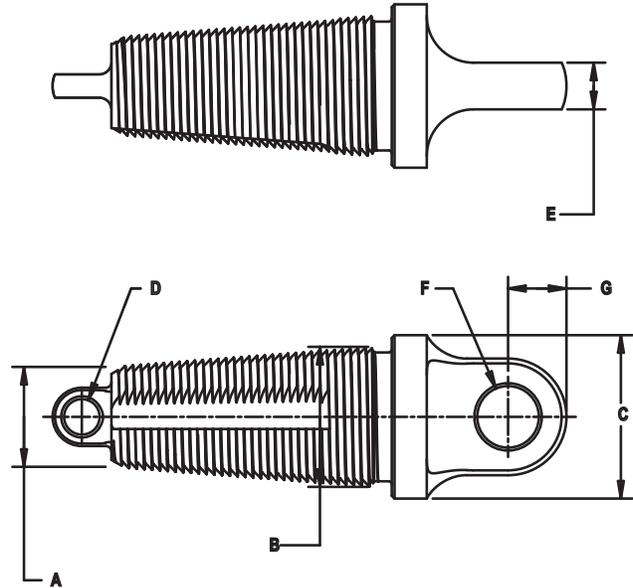

Part Number	Nominal Size	Innerduct ID Range		Max OD C		Hole Diameter D		Tang Thickness E		Tang Hole Diameter F		Tang Hole Location G	
	(IN.)	A - B (IN.)	A - B (MM)	(IN.)	MM	(IN.)	MM	(IN.)	(MM)	(IN.)	(MM)	(IN.)	(MM)
08914110 *	0.75	.73 - .94	19 - 24	1.25	32	.25	6	.38	10	.50	13	.50	13
08914120 *	1.00	.93 - 1.06	24 - 27	1.38	35	.25	6	.38	10	.50	13	.50	13
08914130 *	1.25	1.16 - 1.43	29 - 36	1.75	44	.38	10	.50	13	.66	17	.63	16
08914140 *	1.50	1.58 - 1.75	40 - 44	2.00	51	.38	10	.50	13	.66	17	.63	16
08914150 **	1.75	1.72 - 1.85	44 - 47	2.25	57	.38	10	.50	13	.66	17	.75	19
08914160 **	2.00	1.97 - 2.12	50 - 54	2.50	64	.38	10	.50	13	.81	21	.75	19

* Compatible with 1/4"-3/8" Threaded Chain Connectors and Condux Swivels 08080912, 08080913, 08210012, and 08210014

** Compatible with 5/16"-1/2" Threaded Chain Connectors and Condux Swivels 08210012 and 08210014



Innerduct Pulling Eye Installation Tool

Fits on a 1/2" drive ratchet (not included) to facilitate insertion of the eye into the innerduct.

Part Number	Description
08913335	Installation Tool



INNERDUCT PULLING PRODUCTS



Innerduct Compatibility Chart

Use the chart to determine which Innerduct Pulling Eyes work with the different sizes of innerduct.


	Innerduct Eye Part No.	Innerduct I.D. Range	Compatible Innerduct					
			0.75"	1.00"	1.25"	1.50"	2.00"	
Swivel Head	08960712	1.06"-1.43" (27 mm-36 mm)	-	SDR 13.5 SDR 15.5 SDR 17 SDR 21	SDR 7 SDR 9 SDR 11 SDR 13.5	SDR 7	-	
	08960715	1.37"-1.68" (35 mm-42 mm)	-	-	SDR 13.5 SDR 15.5 SDR 17 SDR 21	SDR 9 SDR 11 SDR 13.5 SDR 15.5	-	
	08960720	1.93"-2.12" (49 mm-54 mm)	-	-	-	-	SDR 13.5 SDR 15.5 SDR 17	
Fixed Head	Clevis Head	08914110	08914310	.73"-.94" (19 mm-24 mm)	SDR 9 SDR 11 SDR 13.5 SDR 15.5	-	-	-
		08914120	08914320	.93"-1.06" (24 mm-27 mm)	-	SDR 7 SDR 9 SDR 11	-	-
		08914130	08914330	1.16"-1.43" (29 mm-36 mm)	-	SDR 21	SDR 7 SDR 9 SDR 11 SDR 13.5	-
		08914140	08914340	1.58"-1.75" (40 mm-44 mm)	-	-	SDR 21	SDR 13.5 SDR 15.5 SDR 17 SDR 21
		08914150	08914350	1.72"-1.85" (44 mm-47 mm)	-	-	-	SDR 21
		08914160	08914360	1.97"-2.12" (50 mm-54 mm)	-	-	-	-

PULLING EYES & ACCESSORIES

CTS Gas Pipe Pulleys

Tapered buttress threads thread into the gas pipe for maximum pulling strength. These eyes connect directly to a Condux Breakaway Swivel (compatible with Condux 5/8" Breakaway Swivel only). When properly sized and installed, these eyes will not pull out of the gas pipe until the pulling tensions have greatly exceeded the maximum pulling tensions recommended by the gas pipe manufacturers.

Part Number	Description	Dimension
08914005	1/2 Inch CTS Gas Pipe Pulley	.315"-.551" (8 mm-14 mm)
08914007	3/4 Inch CTS Gas Pipe Pulley	.551"-.813" (14 mm-21 mm)
08914010	1 Inch CTS Gas Pipe Pulley	.813"-.1.05" (21 mm-27 mm)

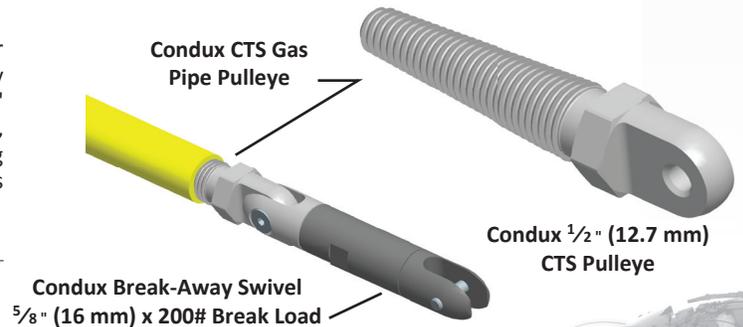

Innerduct Eyes for Micro Duct

Tapered buttress threads into the micro duct for maximum pulling strength.

Part Number	Description
08913547	Innerduct Eyes for Micro Duct (5-9 mm ID)
08913545	Innerduct Eyes for Micro Duct (10-13 mm ID)
08913538	Innerduct Eyes for Micro Duct (13-15 mm ID)

