



V3

Robust and powerful, pneumatic operated fiber blowing machine designed for single cables and for relining of multiple micro ducts. Configuration can be made for cable between 4 and 40 mm and duct dimensions between 10 and 63 mm. The unique Joystick controller and the agile motors securing a optimal control of the installation. With an anodized aluminum construction, the machine is lightweight but still very strong.



Max pressure:
16 Bar



Pushing force:
Up to 1700 N



Cable diameter:
4-40 mm



Duct diameter:
10-63 mm



Weight:
approx 22 kg



Air connection:
1" Claw connector



WxHxD
700 x 300 x 310 mm

FIBER BLOWING MACHINE FOR CABLE 4-40 MM / DUCT 10-63 MM


- Pneumatic operation, double motors.
- Joystick Controller with forward and reverse function.
- Electronic counter for speed and distance.
- Gentle operation with long contact surface on the cable.
- Display for speed, distance and pressure in duct.
- Max. speed 65 m/min, max pushing force on cable 1200 N.
- Adjustable clamping force.
- Option of sub-ducting kit for installing several micro ducts.
- Works with JetLogger
- Duct air quick release valve.

STD CONFIGURATION

- Transport case
- Extra fixtur
- 1 bottle Micro Duct Lube
- 1 bottle Duct Lube
- 1 bottle pneumatic oil
- Service kit
- 12 mm cabels guides
- Drive belts (Red)
- Duct air quick release valve.

ACCESSORIES FOR V3


- Duct clamps
- Cabel seals
- Afterblower
- Cabel guides for 15, 22, 26 and 34 mm
- Floating kit
- 9-12 V adaptor for replacing 9 V digital display battery.
- Jetlogger
- Subducting kit



DUCT AIR VALVE



SECURITY STOP

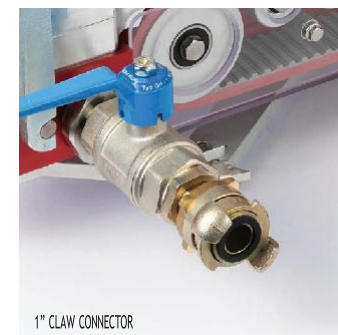

1" CLAW CONNECTOR




DUCT CLAMP (AVAILABLE IN DIFFERENT SIZES)



AFTERBLOWER



CABLE GUIDE (AVAILABLE IN DIFFERENT SIZES)

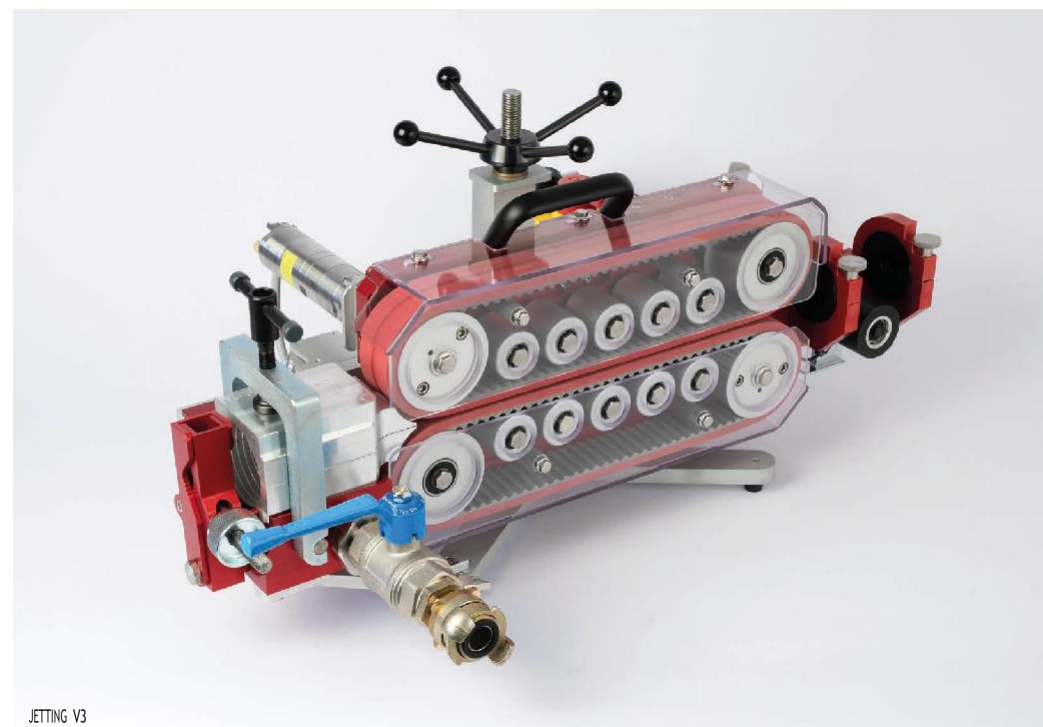

JETTING V3

DARE TO DO IT DIFFERENTLY.