

FSTBP™


Duct Sealant

FLAME RETARDANT



New to the Polywater family of FST™ sealants, the FSTBP™ Duct Sealant is ideal for the protection of ducts 125 mm (5 in.) diameter and larger. Easily mixed in its self-contained burst pack, the FSTBP™ is dispensed into the duct where it expands and hardens to form a strong, closed-cell seal. FSTBP™ Duct Sealant is durable and flame retardant to protect valuable infrastructure from water and fire damage.

- FSTBP™ Duct Sealant has 98% closed-cell content for increased strength and resiliency
- FSTBP™ Duct Sealant resists seven (7) meters (22 ft) of water-head pressure
- FSTBP™ Duct Sealant is compatible with cable and duct materials
- FSTBP™ Duct Sealant complies with TIA-758-B Standard 5.1.1.2.8, 5.4.2.3 and 7.4.2.8.1

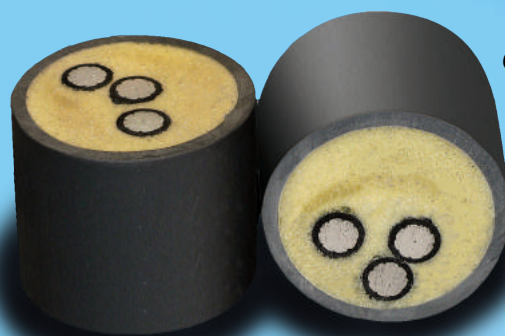

Cross sections of duct with cured FSTBP™ closed-cell foam.




Open-Cell Aerosol Foams & Duct Putties

- Do not resist significant pressure
- Do not fully harden in ducts
- Do sag and shrink over time

Polywater® FSTBP™ Duct Sealant

FSTBP™ Duct Sealant comes in an easy to use, self-dispensing burst pack. The diagrams below show the easy four-step application process of the FSTBP™ Duct Sealant to protect ducts and other infrastructure assets.

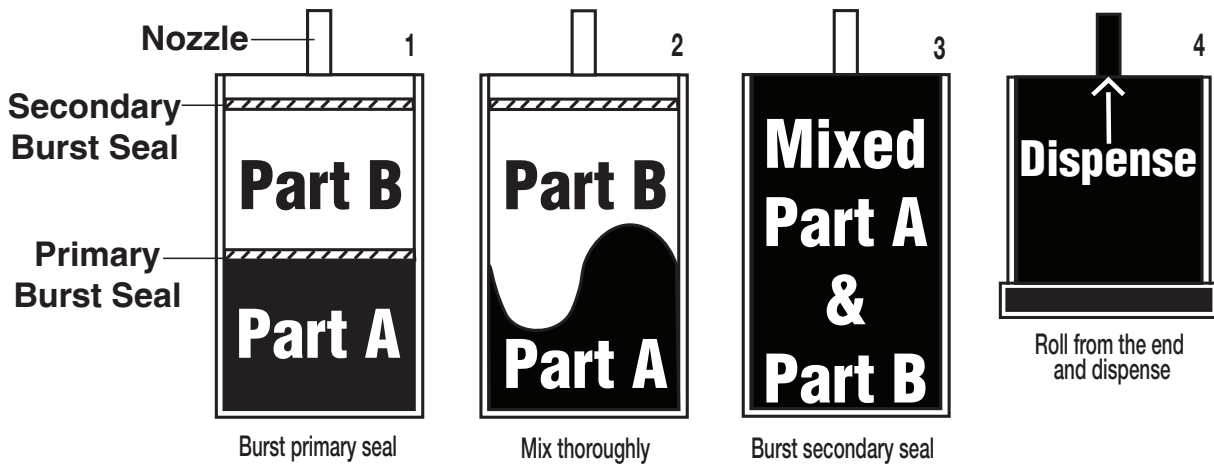

| Cat.No. | Case Components | Case Qty |
|---------------|---|----------|
| FSTBP-200B6C | 6 FST™ Burst Packs, 1 Instruction Sheet | 1 Case |
| FSTBP-200B20C | 20 FST™ Burst Packs, 1 Instruction Sheet | 1 Case |



**American
Polywater®
Corporation**

phone: 1-800-328-9384

1-651-430-2270

fax: 1-651-430-3634

email: support@polywater.com

11222 60th Street North, Stillwater, MN 55082, U.S.A.

ADHESIVES | CLEANERS | LUBRICANTS | **SEALANTS**

WWW.POLYWATER.COM

Important Notice: The statements here are made in good faith based on tests and observations we believe to be reliable. However, the completeness and accuracy of the information is not guaranteed. Before using, the end-user should conduct whatever evaluations are necessary to determine that the product is suitable for the intended use.

American Polywater expressly disclaims any implied warranties and conditions of merchantability and fitness for a particular purpose. American Polywater's only obligation shall be to replace such quantity of the product proven to be defective. Except for the replacement remedy, American Polywater shall not be liable for any loss, injury, or direct, indirect, or consequential damages resulting from product's use, regardless of the legal theory asserted.